

# 2-JAW PARALLEL GRIPPERS


## HRC-03-099400

### ▶ PRODUCT SPECIFICATIONS



#### ▶ Gripping force diagram

Shows the arithmetic total of the individual forces that occur on the gripper fingers, depending on the gripper finger length

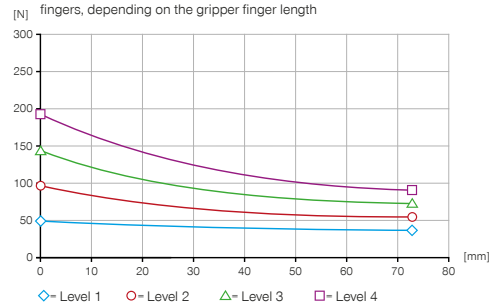

#### ▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



|         |     |
|---------|-----|
| Mr [Nm] | 7   |
| Mx [Nm] | 7   |
| My [Nm] | 5.5 |
| Fa [N]  | 200 |

### ▶ TECHNICAL DATA

| Order no.   | HRC-03-099400    |
|---|------------------|
| Suitable for robot type                             | HANWHA HCR3      |
| HRC design according to ISO/TS 15066                | Yes              |
| HRC form  | collaborative    |
| Cable management                                    | internal         |
| Type of drive                                       | electrical       |
| Control   | Digital I/O      |
| Integrated position sensing                         | Analog 0 to 10 V |
| Stroke per jaw [mm]                                 | 10               |
| Self locking mechanism                              | mechanical       |
| Gripping force in closing (adjustable) max. [N]     | 190              |
| Gripping force in opening (adjustable) max. [N]     | 190              |
| Gripping force in accordance with ISO/TS 15066 [N]* | <140             |
| Closing time [s]                                    | 0.19             |
| Opening time [s]                                    | 0.19             |
| Control time [s]                                    | 0.03             |
| Permissible weight per jaw max [kg]                 | 0.1              |
| Length of the gripper fingers max. [mm]             | 80               |
| Repetition accuracy +/- [mm]                        | 0.05             |
| Operating temperature [°C]                          | 5 ... +50        |
| Voltage [V]   | 24               |
| Current consumption max. [A]                        | 1                |
| Minimum positioning path per jaw [mm]               | 0.5              |
| Protection to IEC 60529                             | IP40             |
| Weight [kg]   | 0.7              |

\*Value based on the parameters described in the ISO/TS 15066, determined with a force measuring device certified by the DGUV (German Social Accident Insurance)

## TECHNICAL DRAWINGS

