

# CUTTING TONGS

## INSTALLATION SIZE ZK1065

### ▶ PRODUCT SPECIFICATIONS



### ▶ INCLUDED IN DELIVERY

	<p>1 [piece]          Locking nut  <b>C093620159</b></p>
--	--

### ▶ RECOMMENDED ACCESSORIES

#### ENERGY SUPPLY

	<p><b>GV1-8X8</b>          Straight Fittings - Quick Connect Style</p>
--	--

	<p><b>WV1-8X8</b>          Angled Fittings - Quick Connect Style</p>
--	--

#### SENSORS

	<p><b>KHD65</b>          Sensor holder</p>
--	--

	<p><b>MFS02-K-KHC-P1-PNP</b>          Magnetic field sensor straight, cable 5 m</p>
--	---

	<p><b>MFS02-S-KHC-P1-PNP</b>          Magnetic field sensor straight, cable 0.3 m - M8 connector</p>
--	--

#### CONNECTIONS / OTHER

	<p><b>BK1065-01</b>          Cutting Insert 15° for plastics</p>
--	--


	<p><b>BK1065-02</b>          Cutting Insert 0° For Plastics</p>
--	---

	<p><b>BK1065-03</b>          Cutting Insert 30° For Plastics</p>
--	--

	<p><b>BK1065-04</b>          Cutting Tong For Plastics</p>
--	--

	<p><b>BK1065-05</b>          Cutting Insert 0° For Steel</p>
--	--

► Technical data	
<b>Order no.</b>	<b>ZK1065</b>
Stroke per jaw [°]	13
Gripping moment in closing [Nm]	400
Closing time [s]	0.1
Opening time [s]	0.4
Operating pressure min. [bar]	2
Operating pressure max. [bar]	6
Nominal operating pressure [bar]	6
Operating temperature min. [°C]	5
Operating temperature max. [°C]	+80
Air volume per cycle [cm <sup>3</sup> ]	130
Weight [kg]	0.67
<b>Possible cutting diameters</b>	
possible cut-Ø max. plastics [mm]	11
possible cut-Ø max. hard-plastic [mm]	8
possible cut-Ø max. copper [mm]	6
possible cut-Ø max. steel [mm]	4

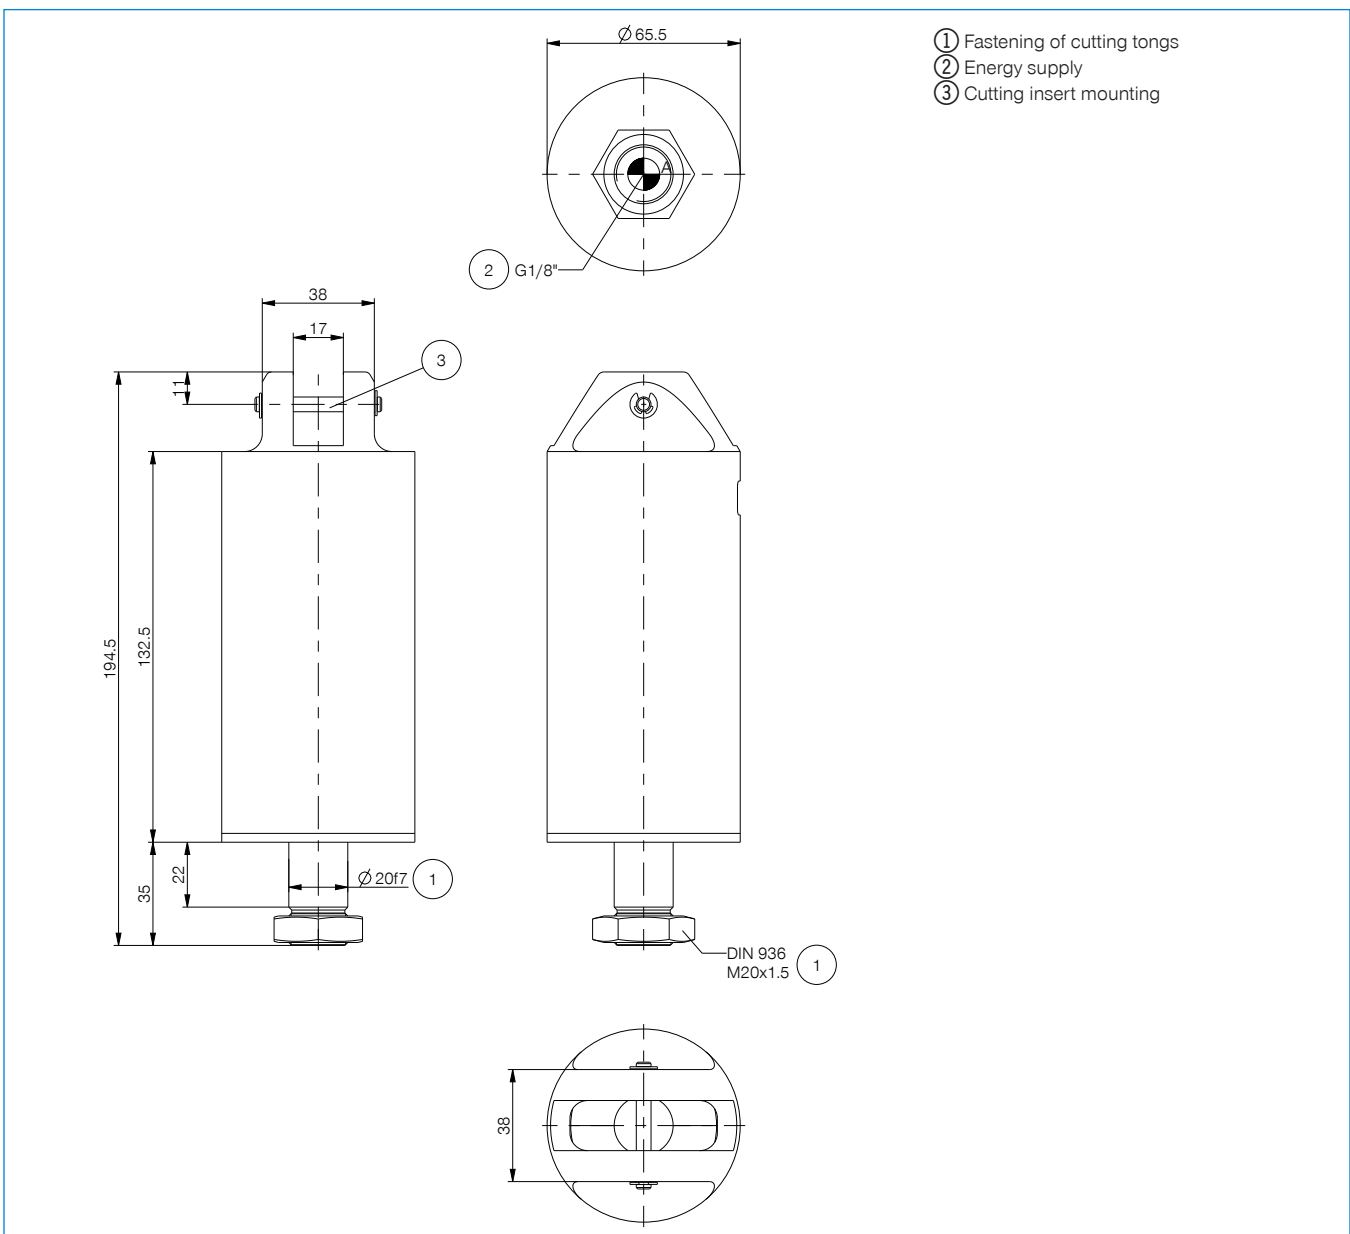


# CUTTING TONGS

## ZK1000 SERIES CUTTING INSERTS

### ▶ CUTTING INSERTS FOR ZK1030


**BK1030-01**

Cutting Insert 15° for plastics




**BK1030-02**

Cutting Insert 40° For Plastics




**BK1030-03**

Cutting Insert 0° For Plastics




**BK1030-04**

Cutting Tong For Plastics




**BK1030-05**

Cutting Insert 0° For Steel




**BK1030-06**

Cutting Insert 25° For Steel




**BK1030-07**

Carbide cutting insert 0° for steel



**BK1030-08**


Carbide Cutting Insert 25° For Steel



### ▶ CUTTING INSERTS FOR ZK1036


**BK1036-01**

Cutting Insert 25° For Plastics




**BK1036-02**

Cutting Insert 40° For Plastics




**BK1036-03**

Cutting Insert 0° For Plastics

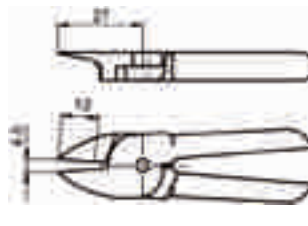


**BK1036-04**

Cutting Tong For Plastics




**BK1036-05**

Cutting Insert 0° For Steel




**BK1036-06**

Cutting Insert 25° For Steel




**BK1036-07**

Carbide cutting insert 0° for steel



**BK1036-08**


Carbide Cutting Insert 25° For Steel



## ▶ CUTTING INSERTS FOR ZK1045


**BK1045-01**

Cutting Insert 15° for plastics




**BK1045-02**

Cutting Insert 40° For Plastics




**BK1045-03**

Cutting Insert 0° For Plastics




**BK1045-04**

Cutting Tong For Plastics

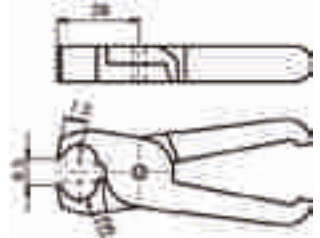


**BK1045-05**

Cutting Insert 0° For Steel




**BK1045-06**

Cutting Insert 30° For Steel




**BK1045-07**

Carbide cutting insert 0° for steel



**BK1045-08**


Carbide Cutting Insert 35° For Steel



## ▶ CUTTING INSERTS FOR ZK1065


**BK1065-01**

Cutting Insert 15° for plastics




**BK1065-02**

Cutting Insert 0° For Plastics




**BK1065-03**

Cutting Insert 30° For Plastics




**BK1065-04**

Cutting Tong For Plastics




**BK1065-05**

Cutting Insert 0° For Steel




**BK1065-06**

Cutting Insert 30° For Steel




**BK1065-07**

Carbide cutting insert 0° for steel



**BK1065-08**

Carbide Cutting Insert 40° For Steel



# CUTTING TONGS

## SERIES ZK1000

### ▶ PRODUCT ADVANTAGES



#### ▶ Extremely lightweight

This light weight generally allows the use of a smaller moving axis, reducing the overall costs of the application in the process





#### ▶ Integrated magnetic field sensing

One of the few cutting tongs on the market that can have its position queried and transferred to the control system with process reliability

#### ▶ Decide for yourself!

Sprue or steel wire: The variety of cutting geometries and materials ensure you always find the correct cuttings

### ▶ SERIES CHARACTERISTICS

Installation size	
ZK10XX	
 <b>5 million maintenance-free cycles (max.)</b>	●
 <b>Spring opening O</b>	●
 <b>Magnetic field sensor</b>	●
 <b>IP30</b>	●



## ► BENEFITS IN DETAIL



- ① **Cutting insert**
  - flexible applicable due to specific cutting geometry
- ② **Return spring**
  - to open the cuttings
- ③ **Mounting clamp**
  - mounting and positioning of magnetic field sensors
- ④ **Magnetic field sensor**
  - for position sensing
- ⑤ **Drive**
  - single-acting pneumatic cylinder
- ⑥ **Housing**
  - Hard-coated aluminum alloy
- ⑦ **Mounting and positioning**
  - via fit, thread and lock nut
- ⑧ **Energy supply**

## ► TECHNICAL DATA

Installation size	Stroke [°]	Gripping moment [Nm]	Weight [kg]	IP class
ZK1030	4.25	14	0.08	IP30
ZK1036	5	40	0.13	IP30
ZK1045	8.5	98	0.24	IP30
ZK1065	13	400	0.67	IP30

## ► FURTHER INFORMATION IS AVAILABLE ONLINE



All information just a click away at: [www.zimmer-group.com](http://www.zimmer-group.com). Find data, illustrations, 3D models and operating instructions for your installation size using the order number for your desired product. Quick, clear and always up-to-date.